

Texas Local Government Purchasing Cooperative
The Buy Board

PRICING WORKSHEET

PRICING WORKSHEET				
Buying Agency: City of University Park			Date Prepared 4/28/2021	
Southwest International Trucks			Contract 601-19	
Product Description: 2022 International HX620 6x4				
60,320 GVWR Tractor			HX620 6x4 is base price	
Contact Person: Owen Downham			Item: Base Chassis Bid	\$ 101,567.08
B: Options		Option cost is 80% of MSRP		
Frame rails with tapered rear	69.60	Cummins X15 450 HP 1650 Torque		9,924.80
Crossmember frame tow for heavy duty	206.40	Fan override switch		23.20
Tow pin front 150,000 Capacity	670.40	Allison 4500 RDS 6 Speed		20,459.20
120,000 PSI Frame rails	156.00	Oil Cooler for transmission		1,096.80
Meritor 14,600 front capacity	1,209.60	Synthetic transmission oil and stalk shifter		364.00
16,000 Lb. front suspension	226.40	Neutral at Stop		580.00
Brake system for tractor applications	276.80	Meritor 46,000 Lb. rear axle		5,279.20
Air Brakes ABS 6 channel	2,086.40	Hendrickson air ride suspension		751.20
Air dryer mounting	40.00	Diff switch control and rear axle lube		602.40
Dual Steering gears	927.20	Fuel heater and 80 gallon fuel tank		400.80
Dana spicer driveline system	578.40	Air cleaner restriction gauge and 2 grab handles		249.60
Aluminum aftertreatment cover	222.40	Air ride driver's seat and stationary passenger's seat		508.80
Tailpipe turnback type	51.20	1 hood mirror and look down mirror on right side		95.20
2 air horns mounted on hood	88.00	Steel front and rear wheels		448.00
Battery disconnect switch	198.40	Front and rear Stemco wheel seals		168.80
AM/FM radio	294.40	Flo-Thru tire valve and wheel bearing lube		66.40
Aux trailer socket Phillips	183.20	11R24.5 Continental front and rear tires		1,766.40
Jump start stud	134.40	Commodity surcharge		750.00
Power source additional	30.40	Freight increase		250.00
Chrome grille with black mesh	263.20	2 line wet kit for trash trailer w/ tank and pump		\$5,950.00
Bug screen	\$104.80	Black Poly fenders		\$1,900.00
Chassis coating corrosion resistant	\$400.00	60" deck plate		450.00
Jost Stationary fifth wheel	\$1,528.00	Right weigh system		5,500.00
Mudflap holders with mud flaps	\$130.40	Customer hose tender		300.00
Federal emissions & sticker for Cummins X15	\$447.00	Special repeat customer discount		-28,500.00
Subtotal Column 1:	\$ 10,523.00	Subtotal Column 2:		\$29,384.80
Total Options				\$ 39,907.80
CHASSIS WITH FACTORY OPTIONS				\$ 141,474.88
TOTAL BODY PRICE				See attached body spec sheet 0.00

Additional Options:				
Buy Board Fee				400.00
Transportation				0.00
DOT Inspection with Fire Extinguisher and Road Flare Kit				250.00
TOTAL BUY BOARD PRICE				\$142,124.88

Tanner Bragg	
Southwest International Trucks-Arlington.	
Arlington, Texas 76010	
Fax# 817-861-7084	
Office# 817-664-2906	
E-mail Address: tanner.bragg@swit-tx.com	

To purchase this unit, please issue a purchase order to Southwest International Trucks, Inc. and send it to the Buy Board.
We will order your truck when we receive notification from the Buy Board of your purchase order.

Thank you,
Tanner Bragg



Hx620 SBA

Sales Proposal For:


CITY OF UNIVERSITY PARK

Presented By:

SOUTHWEST INTL TRKS INC

Prepared For:
CITY OF UNIVERSITY PARK
Owen Downham
4420 WORCOLA ST.
DALLAS, TX 75206-
(214)987 - 5480
Reference ID: N/A

Presented By:
SOUTHWEST INTL TRKS INC
Tanner K Bragg
2401 E PIONEER PKWY
ARLINGTON TX 76010 -
(817)461-2931

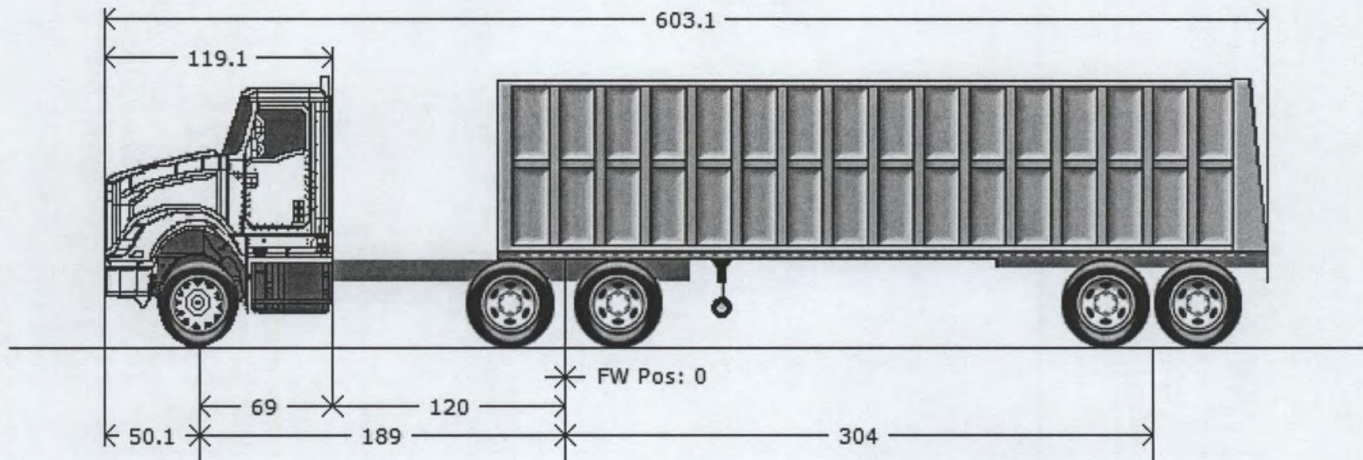

Model Profile
2022 HX620 SBA (HX620)

AXLE CONFIG:	6X4
APPLICATION:	Transfer Trailer
MISSION:	Requested GCWR: 80000. Calc. GCWR: 115000. Calc. GVWR: 60320 Calc. Start / Grade Ability: 22.26% / 1.74% @ 55 MPH Calc. Geared Speed: 88.6 MPH
DIMENSION:	Wheelbase: 189.00, CA: 120.00, Axle to Frame: 65.00
ENGINE, DIESEL:	{Cummins X15 450 V} Productivity Series, EPA 2021, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 950 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-14-143A} Wide Track, I-Beam Type, 14,600-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-160P} Single Reduction, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R24.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 473 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(8) 11R24.5 Load Range G HDL2 (CONTINENTAL), 470 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, TANDEM:	{Hendrickson HAS-460-55} 46,000-lb Capacity, 55" Axle Spacing, 9.5" Ride Height, with Shock Absorbers
PAINT:	Cab schematic 100LZ Location 1: 9219, Winter White (Std) Chassis schematic N/A

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
HX62000	Base Chassis, Model HX620 SBA with 189.00 Wheelbase, 120.00 CA, and 65.00 Axle to Frame.	9444/6697	16141

AXLE CONFIGURATION

1AND	AXLE CONFIGURATION {Navistar} 6x4	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		

ENGINE

12ETL	ENGINE, DIESEL {Cummins X15 450 V} Productivity Series, EPA 2021, 450HP @ 1900 RPM, 1650 lb-ft Torque @ 950 RPM, 2000 RPM Governed Speed, 461 Peak HP (Max)	617/60	677
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 806 SqIn Charge Air Cooler	0/0	0
	<u>Includes</u> : RADIATOR HOSES Premium, Rubber		
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12VCA	AIR CLEANER Single Element, with Integral Pre-Cleaner, Engine Mounted	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12WZB	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)	2/0	2
12VHG	FEDERAL EMISSIONS {Cummins X15} EPA, OBD and GHG Certified for Calendar Year 2021	0/0	0
12WCX	HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type	0/0	0
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System	0/0	0

TRANSMISSION

13AUW	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway	74/34	108
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0

Code	Description	F/R Wt	Tot Wt
		(lbs)	(lbs)
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WCU	OIL COOLER, AUTO TRANSMISSION {Modine} Remote Mounted; Not for use with Retarder	43/-7	36
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1

CLUTCH

11001	CLUTCH Omit Item (Clutch & Control)	-124/-20	-144
-------	-------------------------------------	----------	------

REAR AXLES, SUSPENSIONS

14HRL	AXLE, REAR, TANDEM {Meritor RT-46-160P} Single Reduction, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.30	0/452	452
14ULB	SUSPENSION, REAR, AIR, TANDEM {Hendrickson HAS-460-55} 46,000-lb Capacity, 55" Axle Spacing, 9.5" Ride Height, with Shock Absorbers	0/-68	-68
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints	0/0	0
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash	1/0	1

FRONT AXLES

2ASM	AXLE, FRONT NON-DRIVING {Meritor MFS-14-143A} Wide Track, I-Beam Type, 14,600-lb Capacity	0/0	0
------	---	-----	---

FRONT SUSPENSIONS

3ADE	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 16,000-lb Capacity, with Shock Absorbers	-91/0	-91
------	--	-------	-----

CABS, COWLS, BODIES

16030	CAB Conventional, Day Cab	0/0	0
-------	---------------------------	-----	---

Includes

- : CAB REAR SUSPENSION Air
- : CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted
- : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window
- : CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area
- : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger
- : COURTESY LIGHT (2) Driver and Passenger Door Mounted
- : DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console
- : FLOOR COVERING Rubber, Black
- : GLASS, ALL WINDOWS Tinted
- : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side : READING LIGHT, CAB Located in Overhead Console : STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door		
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
	<u>Includes</u> : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps		
16VLW	CAB INTERIOR TRIM Diamond, for HX Day Cab	0/0	0
	<u>Includes</u> : DOOR TRIM, INTERIOR Bright Handle : INSTRUMENT PANEL TRIM Black, Black Gauges with Black Bezels : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16GDG	GAUGE CLUSTER Premium Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 5 Inch LCD Color Display	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY, Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for Fuel/DEF, DPf Level		
16HKC	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Under Hood Cleaner Mounted with Internal Switch, with Text Message in Cluster	0/0	0
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar	0/0	0
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16SNW	MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"	3/0	3
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	0/0	0
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16SPB	MIRROR, CONVEX, HOOD MOUNTED (1) Right Side, Black, 7.5" x 7"	5/0	5
16XRX	MODESTY PANEL Painted	0/0	0
16LWL	SEAT, DRIVER {ISRI} Series 300, Air Suspension, High Back, Mordura, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt	0/0	0
16SRM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Mordura Cloth, with Fixed Back, with Under Seat Storage	29/11	40
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
FRAMES			
1CGC	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 12.250" x 3.380" x 0.375" (304.8mm x 85.6mm x 9.5mm); 550.0" (13970mm) Maximum OAL	40/120	160
1LRB	BUMPER, FRONT Contoured, Steel, Painted, Heavy Duty, for HX	0/0	0
1AMS	CROSSMEMBER, FRAME TIE for Heavy Duty	51/5	56
1616	FRAME RAILS WITH TAPERED REAR	0/-7	-7
1VBC	TOW PIN, FRONT Heavy Duty; 150,000-lb. Total Capacity	93/-19	74
1W XK	WHEELBASE RANGE 148" (375cm) Through and Including 189" (480cm)	-18/18	0
BRAKES			
4092	BRAKE SYSTEM, AIR Dual System for Tractor Applications Includes : BRAKE LINES Color and Size Coded Nylon : GLAD HANDS (2) One for Service and One for Emergency; Trailer Hoses from Cab : HAND CONTROL VALVE, AIR Mounted in Instrument Panel : HAND CONTROL VALVE, AIR Mounted on Steering Column : PARKING BRAKE CONTROL Yellow and Red Knobs, Located on Instrument Panel : PARKING BRAKE VALVE Combination Valve for Tractor and Trailer : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for Forward Rear Axle : TRACTOR PROTECTION VALVE	19/-3	16
4AZY	AIR BRAKE ABS {Bendix AntiLock Brake System} 6-Channel (6 Sensor/6 Modulator) Electronic Stability Program, with Automatic Traction Control	0/0	0
4XDP	BRAKES, FRONT {Meritor 16.5X5 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 5", 14,600-lb Capacity	-23/0	-23
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4LAG	SLACK ADJUSTERS, FRONT {Gunitex} Automatic	14/0	14
4XDS	BRAKES, REAR {Meritor 16.5X8.625 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 8.625", 23,000-lb Capacity per Axle	0/150	150
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/14	14
4LGG	SLACK ADJUSTERS, REAR {Gunitex} Automatic	0/28	28
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/30	30
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4EDM	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 110 psi Cut-In/130 psi Cut-Out	0/0	0
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	0/0	0
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail	0/0	0
4WXR	DRAIN VALVE (2) {Berg} with Pull Chains, for Air Tanks	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
STEERING			
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	109/-13	96
5710	STEERING COLUMN Tilting and Telescoping	0/0	0
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
DRIVELINES			
6DGX	DRIVELINE SYSTEM {Dana Spicer} Service Free SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4	4/3	7
EXHAUST SYSTEMS			
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side	0/0	0
7BEU	AFTERTREATMENT COVER Aluminum	0/0	0
7SAP	ENGINE COMPRESSION BRAKE {Cummins} Interbrake For Cummins Signature/ ISX/X15 Engines; Furnished with Engine	0/0	0
7WDM	EXHAUST HEIGHT 10'	0/0	0
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	0/0	0
7WAZ	TAIL PIPE (1) Turnback Type	-10/-3	-13
ELECTRICAL SYSTEMS			
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	Includes		
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount	0/0	0
8THH	AUX. TRAILER SOCKET {Phillips} 7-Way, with Battery Fed Circuit to Center Pin, with 25 Amp Fuse and Relay Controlled by Switch (with Indicator Light) Controlled by Accessory Side of Key Switch, Switch Mounted on Instrument Panel	7/0	7
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	0/0	0
8RLZ	BATTERY DISCONNECT SWITCH {Cole-Hersee 75920-06} 300 Amp, Disconnects Cab Power, Does Not Disconnect Charging Circuits, Locks with Padlock, Battery Box Mounted	2/0	2
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8RNB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8XHT	HEADLIGHTS Halogen, Composite Combination	0/0	0
8836	HORN, AIR (2) Single Bell, Organ Tone, Extra Long, Chrome	4/0	4
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8WBW	JUMP START STUD Remote Mounted	2/0	2
8XHR	POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) & USB Port, Located in the Instrument Panel	0/0	0
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post	0/0	0
8RPT	RADIO AM/FM/WB/Clock/USB Input/Auxiliary Input	3/0	3
8RBZ	SPEAKER, AUXILIARY, CB RADIO with Jack for CB; Mounted Left Side Above Driver's Door	0/0	0
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	0/0	0
8WEZ	TURN SIGNAL SWITCH Self-Canceling	0/0	0

FRONT END

9ASE	FRONT END Tilting, Composite	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5
9HCN	GRILLE Chrome Vertical Accent Bars, with Black Mesh	0/0	0
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0

SPEEDOMETER, TOOLS, MISC

10021	CHASSIS COATING Corrosion Resistant E-Coat Primer Coating for Single Frame Rails	0/0	0
10JAY	FIFTH WHEEL, STATIONARY {Jost JSK36NSL-DB8X} 7.93" Above Top of Frame, Left Hand Release	0/380	380
810000	FIFTH WHEEL LOCATION On Rear Axle Centerline	0/0	0
10WPR	MUD FLAP HOLDER Spring Loaded, Painted Black, with Red and White Reflective Tape, Less Flaps	-7/29	22
10WSX	MUD FLAPS, REAR Black Poly, with International Logo, Less Holders	-3/14	11
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0

FUEL TANKS

15SGL	FUEL TANK Non-Polished Aluminum, 24" Dia, 80 US Gal (303L), Mounted Left Side, Under Cab	-6/13	7
15WDR	DEF TANK 10.6 US Gal (40L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
15LNA	FUEL HEATER {Cummins} Plumbing for Thermal Recirculation Valve (TRV) Mounted to Cummins X15 Engines, Thermostatically Controlled	0/0	0
15LKU	FUEL/WATER SEPARATOR {Racor} Fuel Pre-Filter and Filter Base, Includes Water-In-Fuel Sensor	0/0	0

WHEELS, TIRES - FRONT

27DTD	WHEELS, FRONT {Maxion 90542} DISC; 24.5x8.25 Rims, Painted Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	24/0	24
7384225443	(2) TIRE, FRONT 11R24.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 473 rev/mile, 75 MPH, All-Position	26/0	26

WHEELS, TIRES - REAR

28DTD	WHEELS, REAR {Maxion 90542} DUAL DISC; 24.5x8.25 Rims, Painted Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/96	96
7374225432	(8) TIRE, REAR 11R24.5 Load Range G HDL2 (CONTINENTAL), 470 rev/mile, 75 MPH, Drive	0/96	96

WHEELS MISC OPTIONS

29PAR	PAINT IDENTITY, FRONT WHEELS Disc Front Wheels; with Vendor Applied White Powder Coat Paint	0/0	0
29PAS	PAINT IDENTITY, REAR WHEELS Disc Rear Wheels; with Vendor Applied White Powder Coat Paint	0/0	0
29ACD	TIRE VALVE CAP Flo-Thru Design	0/0	0
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil	0/0	0
29598	WHEEL SEALS, FRONT {Stemco Voyager} Oil Lubricated Wheel Bearings ILO Standard Oil Seals	0/0	0
29597	WHEEL SEALS, REAR {Stemco Voyager} Oil Lubricated Wheel Bearings	0/0	0

Services Section:**WARRANTY**

40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B	0/0	0
-------	---	-----	---

Total Component Weight:**10344/8110 18454**

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.